


ApresiaLightGM212GT-PoE Specification

- 1.Interface
10BASE-T/100BASE-TX/1000BASE-T : 8 port
1000BASE-X : 4 port(SFP)
- 2.Operating Temperature
-5~50 degrees(0 degrees or more at startup)
- 3.Operating Humidity
10~90 %
- 4.Power supply specification
AC100~120 V \pm 10%
AC200~240 V \pm 10%
- 5.Color
Blue

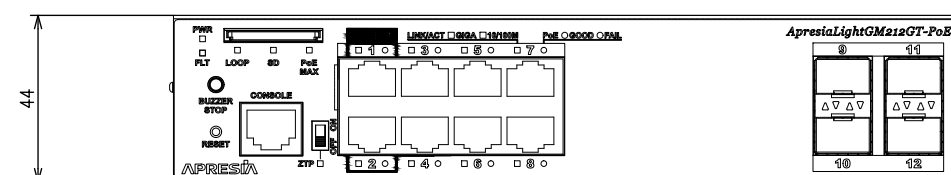

| | | | | | |
|-----------------------|-----|-----------|---|--|----|
| 製図 | 板橋 | '23.02.10 | | 1000M スイッチングハブ APLGM212GTPOE CADデータ | |
| 審査 | 鷲見 | 入庫 | 投影法 | | |
| | 佐々木 | |  | | |
| | | | | | 尺度 |
| APRESIA Systems, Ltd. | | | | AN3700238 | |
| | | | | | |
| | | | | | |
| | | | | 訂正 | |
| | | | | A | |
| | | | | | |